


Semi-Rigid Aluminium Flex

Semi-Rigid Aluminium Flex is a high-quality aluminium, Triple Lock Flexible Ducting. With its high operating temperature and low pressure loss, Semi-Rigid Aluminium Flex is the best option for kitchen range hoods and, bathroom and laundry ventilation.

Semi-Rigid Aluminium flex is supplied as a standard 3 metre length, compressed to 1.2m for easy shipping. (Also available in uncompressed format to special order)

The Triple Locked corrugated construction provides:

- Air tight seams without using adhesive
- Excellent flexibility without loss of strength
- Lightweight (easy to use and manipulate)
- Self-supporting (eliminating hangers)
- Highly puncture and corrosion resistant

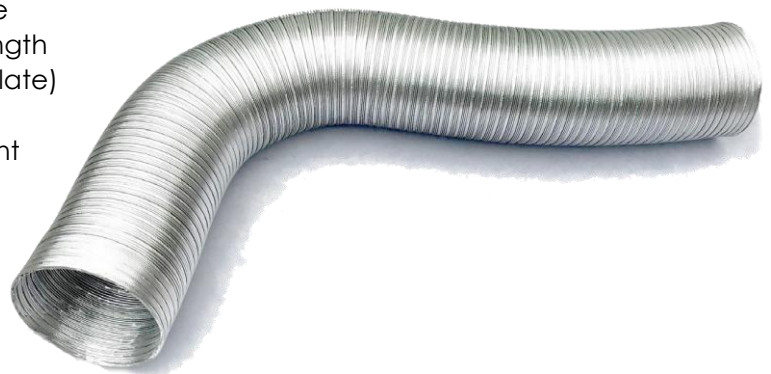

Technical Data

- Temperature Rating – 30°C to +240°C
- Manufactured material thickness 0.10mm
- Complies with Australian Standards – AS1668.1
- 4 Zero Fire Rating complies to Australian Standard – 1530.3

Available Options

- Custom Lengths
- Compressible

Order Code	Description	Standard Compressed Length	Standard Expanded Length
RLM00D100	Semi Rigid Flex 100mm	1.2m – 1.6m	3.0m
RLM00D125	Semi Rigid Flex 125mm	1.2m – 1.6m	3.0m
RLM00D150	Semi Rigid Flex 150mm	1.2m – 1.6m	3.0m
RLM00D200	Semi Rigid Flex 200mm	1.2m – 1.6m	3.0m
RLM00D250	Semi Rigid Flex 250mm	1.2m – 1.6m	3.0m
RLM00D300	Semi Rigid Flex 300mm	1.2m – 1.6m	3.0m
RLM00D350	Semi Rigid Flex 350mm	1.2m – 1.6m	3.0m
RLM00D400	Semi Rigid Flex 400mm	1.2m – 1.6m	3.0m
RLM00D450	Semi Rigid Flex 450mm	1.2m – 1.6m	3.0m
RLM00D500	Semi Rigid Flex 500mm	1.2m – 1.6m	3.0m